



1998-2002 Honda Accord Tail Light Bulbs Replacement

Replace the tail light bulbs in a '98 to '02 Honda Accord.

Written By: Miroslav Djuric



INTRODUCTION

Replace the tail light bulbs in a '98 to '02 Honda Accord.



TOOLS:


- [Flathead Screwdriver](#) (1)
-

Step 1 — Tail Light Bulb Assemblies




- Open the trunk using your key in the trunk key slot or by using the lever under the driver's console.

Step 2 — Panel Tail Lights

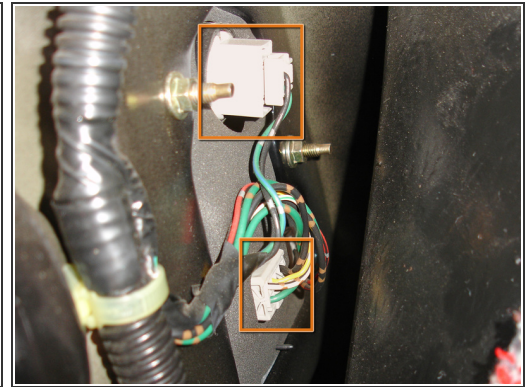


- Remove the small plastic screw along the vertical edge of the trunk entrance using a flathead screwdriver.
- Carefully peel back the trunk liner from around the edge of trunk opening by the light.
- Locate the two panel tail light connectors located between the liner and the panel tail light assembly.

Step 3

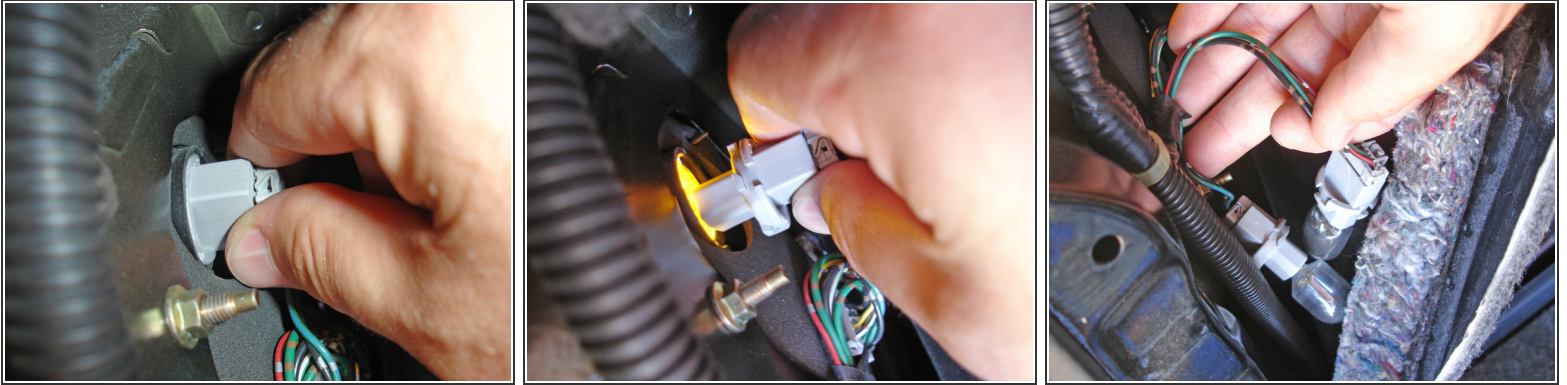

- Grab a light bulb socket and turn it counterclockwise until it can be removed from its hole.
- Repeat this process for the other light bulb socket.

Step 4 — Trunk Lid Tail Lights

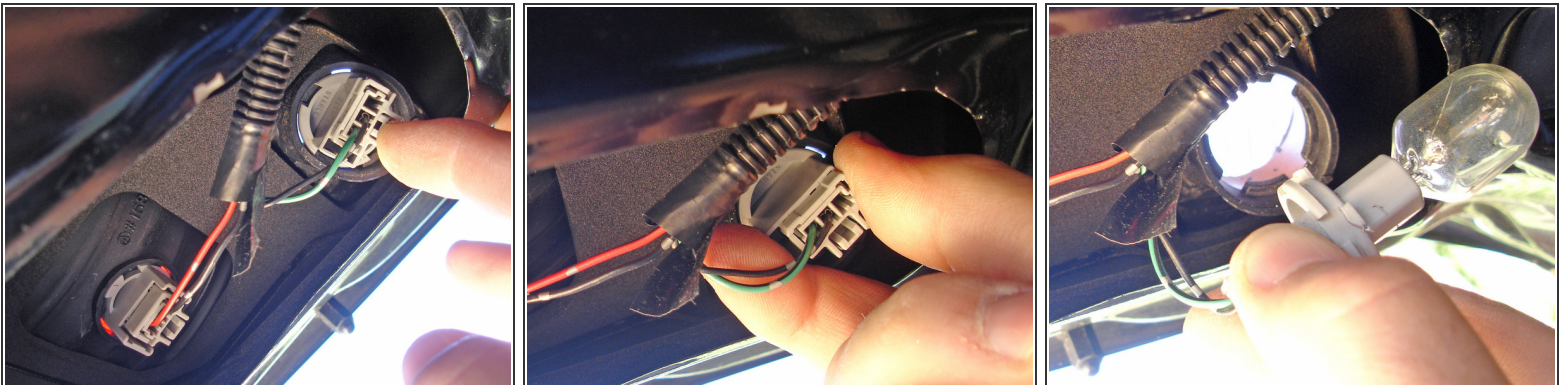

- Locate the light bulb sockets in the trunk lid, located on the back side of the trunk tail lights.
- Turn the light bulb sockets counterclockwise and remove them from their holes.

Step 5 — Tail Light Bulbs



- Remove the light bulbs from their sockets by gently pulling them away from the connectors.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 04:40:53 PM.